


# Surveillance

Intelligent HD Video Solutions





# IntelliSight

## Intelligent Surveillance Management System

ANVIZ surveillance system provides a complete range of solutions, for a smart system for basic surveillance or a more advanced system for security on a larger scale, or even upgrade and replace the current basic facility. IntelliSight will provide a lasting, escalating solution for the better development of your business.



### Desktop

ANVIZ surveillance maintenance and management client provides you a customized layout of preview, easy installation and configuration, multi-terminal synchronization of intelligent alarm, and a more humanized daily security.



### Mobile

Mobile app gives you quick and easy access to local and remote viewing of real-time video streaming, high security user management, flexible sharing of profile, optimized installation and configuration, easy to use.




### Workstation

ANVIZ surveillance fully functional maintenance and management platform ensures a professional installation and configuration, multi-user management, custom profile and share, preset mechanism of intelligent alarm, multi-terminal alarm push, and a more humanized and timely daily security.



### NVR

With the functions of configuration and management of ANVIZ camera, video and event, the recording software can automatically discover ANVIZ IP cameras and ad-hoc network, eliminating the need for initialization and configuration. It supports split screen on the wall directly, authorized QR code for installation and verification of APP, multi-terminal synchronous and seamless connections.

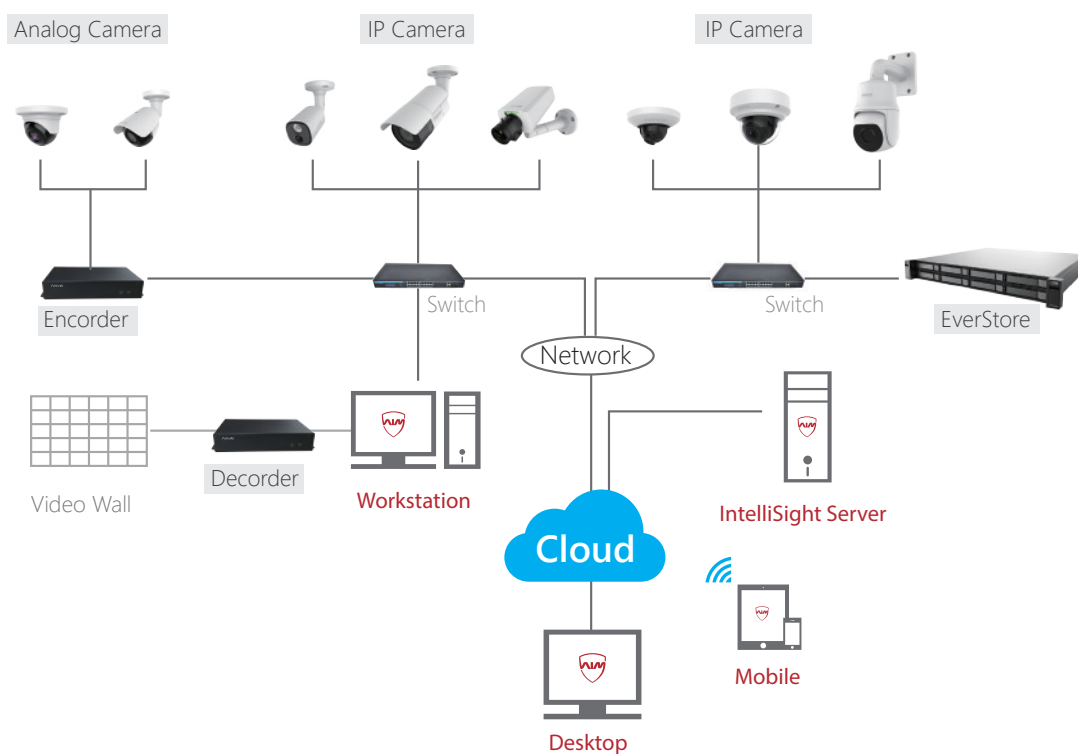

### Intelligent Analysis

- Perimeter Security
- Motion Detection
- Face Recognition

More



Financial



Corporation



Hospital building



School building





Government building



Retail Stores

EasyView			
Mode	EA4502-IRA	EA4502-IRB	EA4502-IREB
Picture			
Resolution	2MP	2MP	2 MP
Image Sensor	1/2.9" CMOS	1/2.9" CMOS	1/2.9" CMOS
Lens	4mm/F2.0	4mm/F1.2	4mm/F1.2
WDR	DWDR	DWDR	DWDR
Horizontal Angle of View	77°	77°	77°
Minimum Illumination	0.01 Lux @(F1.2,AGC ON); 0 Lux with IR	0.01 Lux @(F1.2,AGC ON); 0 Lux with IR	0.01 Lux @(F1.2,AGC ON); 0 Lux with IR
Frame Rate	30fps (1920×1080, 704×576)	30fps (1920×1080, 704×576)	30fps (1920×1080, 704×576)
IR Range	25m		
D/N	IR-CUT		
Audio	N/A		
Shutter Time	1s~1/100000s		
Compression	H.264/MJPEG, Smart H.264		
Internet Interface	RJ-45(10/100/1000Base-T)		
Supported Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS,ONVIF		
Alarm Input/Output	N/A		
Power	DC12V		DC12V/PoE(802.3af)
Environmental	-30°C to 40°C (-22°F to 104°F)		
Protection	IP53	IP66	
Edge Storage	N/A		
Others	3DNR, BLC, Motion Detection		





EcoView		
Mode	EC4502-IRB	EC4502-IREB
Picture		
Resolution	2 MP	2 MP
Image Sensor	1/2.9" CMOS	1/2.9" CMOS
Lens	4mm/F2.0	4mm/F1.2
WDR	DWDR	DWDR
Horizontal Angle of View	77°	77°
Minimum Illumination	0.01 Lux @(F1.2,AGC ON); 0 Lux with IR	0.01 Lux @(F1.2,AGC ON); 0 Lux with IR
Frame Rate	30fps (1920×1080, 704×576)	30fps (1920×1080, 704×576)
IR Range	25m	
D/N	IR-CUT	
Audio	N/A	
Shutter Time	1s~1/100000s	
Compression	H.264/MJPEG, Smart H.264	
Internet Interface	RJ-45(10/100/1000Base-T)	
Supported Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, ONVIF	
Alarm Input/Output	N/A	
Power	DC12V	DC12V/PoE(802.3af)
Environmental	-30°C to 40°C (-22°F to 104°F)	
Protection	IP66	
SD card slot	support up to 128G micro SD card (suggest class 10)	
Others	3DNR, BLC, Privacy Mask, Motion Detection, ROI, Smart IR	







HiView			
Mode	HI4501-IRE	HI4501-IREW	HI2701-IRE
Picture			
Resolution	2MP	2MP	4MP
Image Sensor	1/2.9" CMOS	1/2.9" CMOS	1/2.9" CMOS
Lens	2.4mm/F2.0	2.4mm/F1.2	2.4mm/F1.2
WDR	DWDR	DWDR	More than 120db
WIFI	No	Yes	No
Minimum Illumination	0.01 Lux @(F1.2,AGC ON); 0 Lux with IR	0.01 Lux @(F1.2,AGC ON); 0 Lux with IR	0.01 Lux(Color)/0.001 Lux(B/W)
Frame Rate	30fps (1920×1080, 704×576)	30fps (1920×1080, 704×576)	20fps (2560×1440, 704×576)
IR Range	15m		
D/N	IR-CUT		
Audio	N/A		
Shutter Time	1s~1/100000s		
Compression	H.264/MJPEG, Smart H.264		
Internet Interface	RJ-45(10/100/1000Base-T)		
Supported Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS,ONVIF		
Alarm Input/Output	N/A		
Power	DC12V/POE(802.3af)		DC12V/PoE(802.3af)
Environment	-30°C to 40°C (-22°F to 104°F)		-30°C to 60°C (-22°F to 140°F)
Protection	IP53	IP53	
SD card	support up to 128G micro SD card (suggest class 10)		
Others	3DNR, BLC, Motion Detection		



JustView			
	JU4502-IRE	JU4502-IREW	JU2702-IRE
			
Resolution	2MP	2MP	4 MP
Image Sensor	1/2.9" CMOS	1/2.9" CMOS	1/3" CMOS
Lens	4mm/F2.0	4mm/F1.2	4mm/F1.2
WDR	DWDR	DWDR	More than 120db
WIFI	No	Yes	No
Minimum Illumination	0.01 Lux @(F1.2,AGC ON); 0 Lux with IR	0.01 Lux @(F1.2,AGC ON); 0 Lux with IR	0.01 Lux @(F1.2,AGC ON); 0 Lux with IR
Frame Rate	30fps (1920×1080, 704×576)	30fps (1920×1080, 704×576)	20fps (2560×1440, 704×576)
IR Range	25m		
D/N	IR-CUT		
Audio	N/A		
Shutter Time	1s~1/100000s		
Compression	H.264/MJPEG, Smart H.264		
Internet Interface	RJ-45(10/100/1000Base-T)		
Supported Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS,ONVIF		
Alarm Input/Output	N/A		
Power	DC12V/PoE(802.3af)		
Environmental	-30°C to 40°C (-22°F to 104°F)		-30°C to 60°C (-22°F to 140°F)
Protection	IP53	IP53	
SD card	support up to 128G micro SD card (suggest class 10)		
Others	3DNR, BLC, Motion Detection		







TopView				
Mode	TO2508-IRE	TO2508-IZRE	TO2708-IRE	TO2708-IZRE
Picture				
Resolution	2M	2M	4M	4M
Image Sensor				
Lens	2.8mm-12mm	2.8mm-12mm (Auto and Vari Focus)	2.8mm-12mm	2.8mm-12mm (Auto and Vari Focus)
WDR	120DB			
Smart function(optional)	RVI (face recognition, object recognition)			
Minimum Illumination	0.001Lux			
Frame Rate	Main Stream (1920×1080@30fps), Sub Stream (704×576@30fps)		Main Stream (2560*1440@25fps), Sub Stream (704×576@30fps)	
IR Range	50-70M			
D/N	IR-CUT			
Audio	1-ch 3.5 mm audio interface, 1 built-in Microphone； 1-ch 3.5mm audio interface			
Shutter Time	1/3s~1/100000s			
Compression	H.264, MJPEG, G.711 for audio compression			
Internet Interface	RJ-45 (10/100/1000Base-T)			
Supported Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS			
Alarm Input/Output	1 in and 1 out (Network disconnect, IP address conflict, Storage exception)			
Power	DC12V/POE (-E model)			
Environment	-30°C to 60°C (-22°F to 140°F)			
Protection	IK10, IP66			
SD card slot	Micro SD up to 128G, ( suggest Class10)			
Power Consumption	<12W			





OpenView				
Mode	OP2508-IRE	OP2508-IZRE	OP2708-IRE	OP2708-IZRE
Picture				
Resolution	2M	2M	4M	4M
Image Sensor	1/2.8" CMOS	1/2.8" CMOS	1/2.8" CMOS	1/2.8" CMOS
Lens	2.8mm-12mm	2.8mm-12mm (Auto and Vari Focus)	2.8mm-12mm	2.8mm-12mm (Auto and Vari Focus)
WDR	120DB			
Smart function (optional)	RVI (face recognition, object recognition)			
Minimum Illumination	0.001Lux			
Frame Rate	Main Stream (1920×1080@30fps),Sub Stream (704×576@30fps)		Main Stream (2560*1440@25fps), Sub Stream (704×576@30fps)	
IR Range	50-70M			
D/N	IR-CUT			
Audio	1-ch 3.5 mm audio interface, 1 built-in Microphone； 1-ch 3.5mm audio interface			
Shutter Time	1/3s~1/100000s			
Compression	H.264, MJPEG, G.711 for audio compression			
Internet Interface	RJ-45 (10/100/1000Base-T)			
Supported Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS			
Alarm Input/Output	1 in and 1 out (Network disconnect, IP address conflict, Storage exception)			
Power	DC12V/POE (-E model)			
Environment	-30°C to 60°C (-22°F to 140°F)			
Protection	IK10, IP66			
SD card slot	Micro SD up to 128G,（ suggest Class10)			
Power Consumption	<12W			

POE Switch				
S1505-4P-65W	S2010-8P-150W	S2018-16P-270W	S2026-24P-400W	
				
IEEE802.3af & IEEE802.3at	IEEE802.3af & IEEE802.3at	IEEE802.3af & IEEE802.3at	IEEE802.3af & IEEE802.3at	
4x10/100Mbps PoE	8x10/100/1000Mbps PoE	16x10/100Mbps PoE	24x10/100Mbps PoE	
1x10/100Mbps RJ45	2x10/100Mbps SFP	2x10/100/1000Mbps Combo	2x10/100/1000Mbps Combo	
1G Switching capacity	5.6G Switching capacity	7.2G Switching capacity	8.8G Switching capacity	
One Key CCTV Mode	13"1U Rack-mount	19"1U Rack-mount	19"1U Rack-mount	

SuperView		
Mode	SU2508-ZE	SU2708-ZE
Picture		
Resolution	2MP	4M
Image Sensor	1/2.8" CMOS	
Lens	2.8mm-10mm (Auto and Vari Focus)	
WDR	120DB	
Horizontal Angle of View	RVI (face recognition, object recognition)	
Minimum Illumination	0.001Lux	
Frame Rate	Main Stream (1920×1080@30fps), Sub Stream (704×576@30fps)	Main Stream (2560×1440@25fps), Sub Stream (704×576@30fps)
D/N	C/CS	
Shutter Time	1-ch 3.5 mm audio interface, 1 built-in Microphone; 1-ch 3.5mm audio interface	
Compression	1/3s~1/100000s	
Audio	H.264, MJPEG, G.711 for audio compression	
Internet Interface	RJ-45 (10/100/1000Base-T)	
Supported Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS	
Power	1 in and 1 out (Network disconnect, IP address conflict, Storage exception)	
Alarm Input/Output	DC12V/POE (-E model)	
Environment	-30°C to 60°C (-22°F to 140°F)	
Edge Storage	Micro SD up to 128G, (suggest Class10)	
Others	<12W	

ShotView (Coming soon)				
Mode	SH2420-I	SH2430-I	SH2520-I	SH2530-I
Picture				
Resolution	1MP	1MP	2MP	2MP
Image Sensor	1/3" CMOS	1/3" CMOS	1/2.8" CMOS	1/2.8" CMOS
Lens	20X(4.7-94mm)/F1.6	30X(4.5-148.5mm)/F1.6	20X(4.7-94mm)/F1.6	30X(4.5-148.5mm)/F1.6
WDR	More than 120db	More than 120db	More than 120db	More than 120db
Horizontal Angle of View	58.3°(w)-3.2(t)°	58.9°(w)-2.11(t)°	58.3°(w)-3.2(t)°	58.9°(w)-2.11(t)°
Minimum Illumination	0.01 Lux	0.01 Lux	0.01 Lux	0.01 Lux
Frame Rate	30fps (1280×720, 704×576)	30fps (1280×720, 704×576)	30fps (1920×1080, 704×576)	30fps (1920×1080, 704×576)
IR Range	150m			
D/N	IR-CUT			
Shutter Time	1s~1/100000s			
Compression	H.264, MJPEG			
Audio	1 in/1 out			
Internet Interface	RJ-45(10/100/1000Base-T)			
Supported Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, ONVIF			
Power	DC12V/AC24V			
Alarm Input/Output	7 in/2 out			
Environment	-30°C to 60°C (-22°F to 140°F)			
Protection	IP66			
Edge Storage	Built-in SD card slot, supports Micro SD / SDHC / SDXC card (up to 64G)			
Others	3DNR, BLC, Privacy Mask, Motion Detection, ROI, Smart IR			

Accessories		
C1401 	B1401 	A-PoE-PD512 
Materia: Al Die-Casting(Shell)	Material: Al Die-Casting	LED: Input and Output LED Indicators
Aluminum Profile(Shield)	Mounting: Wall Hanging	Temperature: -10-60 °C
Weight: 1.2kg	Environment: Indoor/Outdoor	Humidity: MAX 85%
Working Environment: -0 °C ~+50 °C	Load-bearing: 25kg	Applicable Situation: Power over Ethernet
Weather Proof: IP66	Weight: 0.4kg	Size: 102.24mmX45.5mmX27.67mm
Size: 280mm×110mm×115mm	Size: 225mm×74mm×115mm	

	EcoStore	MiniStore		TurboStore		EverStore
						
	NCS115-2	NMS114-1	NMS115-1	NTS135-4	NTS137-4	NES127-8
Network Video Input	16Channel	8 Channel	16Channel	16 Channel	32 Channel	32 Channel
Record Rate	Up to 100Mbps	Up to 100Mbps		Up to 200Mbps		Up to 260Mbps
Audio Input	1 Channel	1 Channel		1 Channel		1 Channel
HDMI Output	1 Channel	1 Channel		1 Channel		1 Channel
VGA Output	1 Channel	1 Channel		1 Channel		1 Channel
Playback	1ch@1080P	1ch@1080P		4ch@1080P		4ch@1080P
Stream Transmission	Support	Support		Support		Support
HDD Interface	2*SATA Port	1*SATA Port		4*SATA Ports		8*SATA Ports
Maximum Storage	Up to 8TB	Up to 4TB		Up to 16TB		Up to 32TB
Network Interface	5*RJ45 10/100Mbps(4 PoE)	1*RJ45 10/100Mbps		1*RJ45 10/100/1000Mbps		2*RJ45 10/100/1000Mbps
Serial Interface	N/A	N/A		N/A		1*RS232 /1*RS485
USB	2*USB Ports	2*USB Ports		3*USB Ports		3*USB Ports
Alarm Input	1	N/A		N/A		4 Channel
Alarm Output	1	N/A		N/A		4 Channel
Power Supply	DC48V 1.5A	DC12V 2A		DC12V 5A		AC100 ~ 240V
Power Consumption	≤20W	≤20W		≤50W		≤100W
Dimension(WxDxH)	173mm x 122mm x 236mm (6.8" x 4.8" x 9.3")	170mm x 233mm x 44mm (6.7" x 9.2" x 1.7")		170mm x 230mm x 135mm (6.7" x 9.0" x 5.3")		1.5U, 440mm x 450.8mm x 60mm (17.3" x 17.7" x 2.4")
Weight	≤1.5kg(3.3 pounds)	≤1.5kg(3.3 pounds)		≤3.5kg(7.7 pounds)		≤9.5kg(20.9 pounds)
Network Function	IPv4, IPv6, HTTP, UPnP, NTP, SNMP, PPPoE, DNS, FTP, ONVIF					
Audio Output	1ch, Sync Video Output					
Compression	H.264/MPEG4/MJPEG					
Recording Resolution	1080P/720P					
Recording Mode	Manual, Motion Detection, Schedule, Alarm					
Backup Mode	HDD, USB HDD, USB CD&DVD-RW					
Voice Intercom	1 Channel					
Working Environment	-10 C ~ +55 C /10% ~ 90%					

## IP Camera

OP2708-IRE OpenView 4MP 2.8-12mm IR WDR PoE

<b>OP</b>	<b>2</b>	<b>7</b>	<b>08</b>	<b>IRE</b>
Model	Series No.	Resolution	Lens	Functions
EA : EasyView HI : HiView JU : JustView OP : OpenView SH : ShotView SU : SuperView TO : TopView EC : EcoView		1: <4CIF 2: 4CIF 3: 960H 4: 1MP 5: 2MP 6: 3MP 7: 4MP 8: 5MP 9: 8MP	00: No Lens 01: Fixed Focal Length<=3mm 02: Fixed 3mm<Focal Length<=4mm 03: Fixed 4mm<Focal Length<=6mm 04: Fixed 6mm<Focal Length<=8mm 05: Fixed 8mm<Focal Length<=12mm 06: Fixed 12mm<Focal Length<=16mm 07: Fixed Focal Length>16mm 08: Vari Focal Zoom 2-4X 2.8-12mm 09: Vari Focal Zoom 2-4X 7-22mm 10-39: Vari Focal Zoom 10-39X	I : Built-in LED Z : Motorized Lens R : WDR W : WIFI E : POE P : PAL N : NTSC A : Distinction bit B : Distinction bit

## NVR

NES127-8 Network EverStore 1.5U 32CH 8HDD

<b>N</b>	<b>ES</b>	<b>1</b>	<b>2</b>	<b>7</b>	<b>8</b>
Type	Model	Series No.	Structure	Channel	HDD
N : Network D : Digital	EA: EasyStore MS: MiniStore TS: TurboStore ES: EverStore		1. Desktop 2. 1.5U 3. Tower	1: 1ch 2: 2ch 3: 4ch 4: 8ch 5: 16ch 6: 24ch 7: 32ch 8: 64ch	1. 1 HDD 4. 4 HDD 8. 8 HDD

# About Anviz

Founded in 2001, Anviz is a global leader in the field of intelligent security including Biometric and RFID. Cutting edge technologies, sophisticated QA system (ISO certified) and worry-free services & support provide our partners with the key of business success.

Anviz dedicates to offer professional and comprehensive security solutions. With the continuously growing demand of public and private security, Anviz announced the surveillance product line which was created based on the innovations of our optical and digital image processing technology.

Combining the high-quality products and cost-effective security solutions, Anviz serves various clients from government, law, retail, industrial, commercial, financial, medical, education, etc.

## AGPP Anviz Global Partner Program

AGPP is Anviz Global Partner Program. It is designed for industry-leading distributors, resellers, software developers and system integrators highly qualified in providing intelligent security solutions of Biometric, RFID and Surveillance in targeted vertical markets. The program helps partners build a sustainable business model in a fast-changing environment, where customers require value-added services, focused technical expertise and high levels of satisfaction.



<b>Aggressive</b> Industry-leading Margins	<b>Priority</b> Partner Technical Support	<b>Online</b> Ordering and Private Partner Portal	<b>Partner</b> Training Provided
<b>Assisted</b> Marketing Campaign Programs	<b>Preferred</b> Professional Services	<b>Earned</b> MDF CO-OP Funds	<b>Customer</b> Referral and Lead Generation Programs

### Warranty

The Anviz Products, enclosed with this Limited Hardware Warranty will in respect of the hardware be free from defects in design, workmanship and materials under normal use for a period of 1, 2 or 3 years from the date of the original purchase ("Warranty Period").

For more Anviz Warranty Service, please visit:



### Support

Anviz Technical Support provides efficient assistance for your products. With online support services [www.anviz.com/support](http://www.anviz.com/support) and My Anviz App you can rest assured that you'll receive assistance wherever you are, whenever you need it.

My Anviz

"My Anviz" is an application in APP store include in all Anviz technology support and products information:

- 7x24-hour online self service
- Submit any needs and questions anywhere and anytime

\* Scan QR code to download the app



For more information, visit [www.anviz.com](http://www.anviz.com), or email us [sales@anviz.com](mailto:sales@anviz.com).

2018© Anviz Global. All Rights Reserved. Due to the consistent improving of the product, this specification and appearance is subject to change without notice.