


Facepass 7

Standalone Facial Recognition System


Quick Guide V1.0

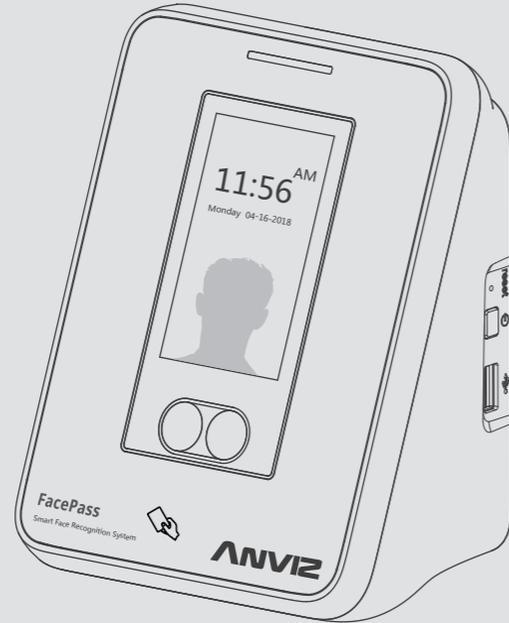

⚠ Notice

- Do not use oily water or sharp objects to stain or damage the display screen
- Fragile parts are used in the equipment, so please avoid operations such as falling, crashing, bending or heavily pressing
- The normal working environment of the display screen and key parts of this equipment is indoor environment. Beyond this temperature range, the equipment will be less effective with reduced functionality and performance
- Please gently wipe the screen and panel with material of soft cloth. Avoid scrubbing with water or detergent
- When unable to exit the equipment or terminate the operation, users can press Reset to restart the device
- This equipment is not waterproof design, therefore please pay attention to waterproof and rainproof in use

1. Packing List

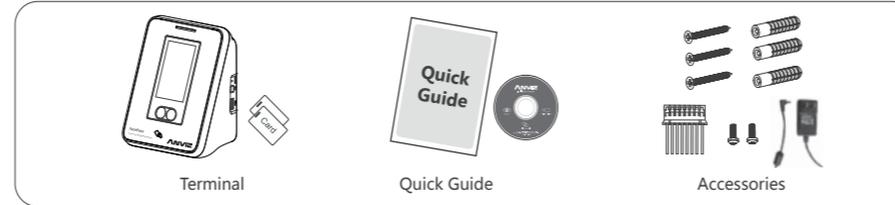

2. Installation Environment

Before the installation:


- FacePass 7 working temperature: 0°C~45°C, working humidity: 20-80%
The direct sunlight would cause great impact on the face recognition performance, so during the installation please :
 - ① Avoid installing the equipment in outdoor environment under direct sunlight
 - ② Conduct waterproof and rainproof protection during outdoor installation
 - ③ Avoid the effect of strong light on the device camera during indoor installation

3. Installation Procedure

Step 1 : Installation Position


- ① The best face recognition distance of the FacePass7 is 30-80cm. The best acquisition angles of the device camera is $\pm 20^\circ$ both horizontal and vertical.
- ② The recommended installation height is 110cm, where the FacePass 7 can recognize the faces of people between 145cm and 195cm in height. Please determine the installation position according to the height of the actual users.

Installation Diagram:

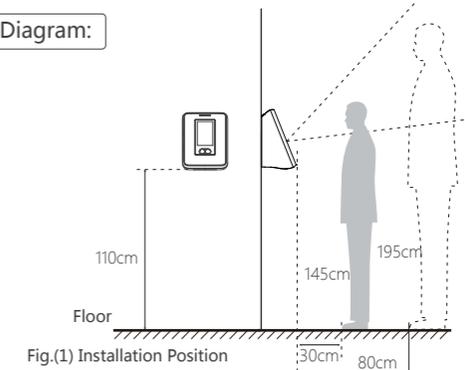

Step 2 : Installation Steps

- ③ Place the back plate at the appropriate position and drill into the wall according to the mounting holes
- ④ Fix the back plate and connect wires
- ⑤ Mount the terminal

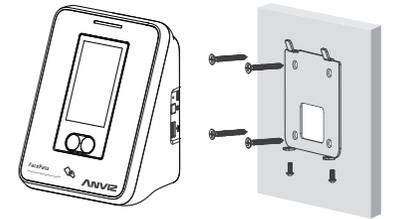

4. Quick Guide

• General Settings

- ① Power on the FacePass 7 and wait for the activation. Click the power icon, then input admin ID and password to enter main menu. Click the user icon, then input employee ID and password to verify.
- ② Click the "0" icon, then input ID "12345", password "12345" to enter main menu. "12345" is the factory default admin ID and password. You can change to your own password or set other users as administrators.
- ③ Enter system settings \ time to set date and time.
- ④ View or edit device ID and admin password in system settings \ device.

