

SuperView

Professional HD Box Network Camera

SuperView is a professional series, providing an easier operation and maintenance by its remote back focus function. The high performance WIFI with external antenna makes it an exceptional performance and ease of installation. The SuperView series is ideal for any indoor or outdoor environment that needs high performance video surveillance.



Key Features


- ▶ Professional-grade Lenses Applications
- ▶ True Day/Night Functionality with Removable IR Cut Filter
- ▶ Remote/Auto Back Focus
- ▶ Two-way Audio and Built-in Microphone
- ▶ Super Wide Dynamic Range
- ▶ Configurable Alarm In/Outputs
- ▶ Smart Edge Storage
- ▶ Support WIFI Privacy
- ▶ Mask Motion
- ▶ Detection Region of Interest
- ▶ Support ABF function

▶ Starlight Illumination

Cameras can provide excellent images even in low light environment






Ordinary Camera

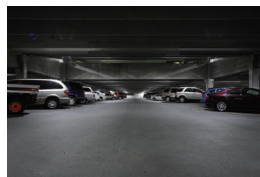

SuperView


▶ Remote/Auto Back Focus

SuperView series supports remotely adjust the back focus and automatic focus which provides an easier installation and more accurate focus

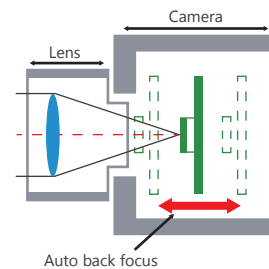

Technical Specifications

Type	SU2508-ZE	SU2708-RE
Resolution	2 Megapixel	4 Megapixel
Image Sensor	1/3" CMOS	1/2.9" CMOS
Shutter Time	1/3s-1/100000s	
Frame rate	50HZ: 25fps(1920×1080) 60HZ: 30fps(1920×1080)	50HZ: 25fps(2560×1440) 60HZ: 30fps(2560×1440)
Lens	2.8-10mm/F1.6 C/CS	2.8-10mm/F1.6 C/CS
Horizontal Angle of View	32°-94°	32°-94°
Minimum Illumination	0.01 Lux (Color) / 0.001 Lux(B/W)	
SN Ratio	> 54dB	
Focus	Support ABF auxiliary focus, remote zoom	

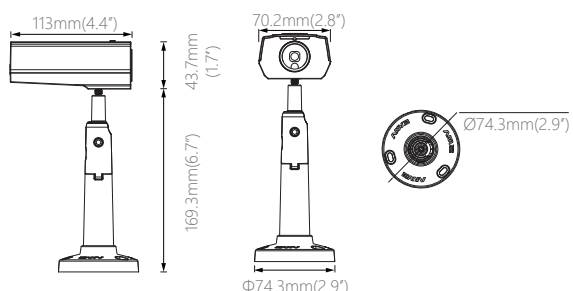Data Transmission	Transfer Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS	WIFI	Wireless Standard	E802.11b, 802.11g, 802.11n	
	Interface Protocol	ONVIF		Transmission Distance	Outdoor: 150m Indoor: 50m (vary with the environment)	
	Multistream	Support main stream and sub stream		Interface	Ethernet	RJ-45 (10/100/1000Base-T)
Compression	Video Compression	H.264/MJPEG	General	Audio	1 line in/1 line out, 1 Mic in	
	H.264 Code Type	BaselLine Profile / Main Profile / High Profile		Alarm	1 in/1 out	
	Compression Output Bitrate	32 Kbps~8Mbps		SD Card	Built-in SD card slot, supports Micro SD / SDHC / SDXC card (up to 64G)	
	Audio Compression	G.711(64Kbps)		RS485	Support	
Image	Image Settings	Rotate Mode(mirror, flip), Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser	Accessories (Optional)	Operating Conditions	-30°C to 60°C (-22°F to 140°F)	
	Day/Night	AUTO		Power Supply	DC12V/AC24V/PoE(802.3af)(-E model)	
	BLC	Support		Power Consumption	MAX 12W	
	WDR	Support		Weight	350g (0.77pounds)	
	DNR	3D DNR		Dimensions	Φ43.7*70.2*113mm (Φ1.7**2.8**4.7")	
	Privacy Mask	Support maximum 4 areas in one picture, various colors available		Safety Certifications	CE, FCC, RoHS	
Smart Function (Optional)	Smart Detection	Motion detection, intrusion detection, cross-border detection, entrance detection, leaving detection, objects left detection, objects taken detection, audio anomaly detection, video mask detection	B1401	Wall Mount Bracket	C1401	IP66 Housing
	Smart Recording	Support offline continuous transmission to ensure the video is not lost				
	Image Enhancement	Support defog, HSBL, Anti Shake DSP				
	Smart Encoding	Support low delay rate, ROI				
	Alarm Trigger	Network disconnect, IP address conflict, Storage exception, Illegal access				