

# W1 **PRO**

## Colorful Screen Fingerprint, RFID Time & Attendance Terminal



W1 Pro is the new generation fingerprint time attendance terminal based on Linux platform and supports cloud application. W1 Pro houses 2.8-inches color LCD and full capacitive touch keypads along with touch optical fingerprint sensor Full upgrade for W series with battery will power your business anytime and anywhere. The webserver function realizes the easily self management of the device

## Colorful Screen Fingerprint, RFID Time & Attendance Terminal

### ■ Features



#### 1Ghz Linux Based CPU

The new Linux based 1Ghz processor ensures the 1:3000 comparison time less than 0.5 second.



#### Optional Battery

The long life battery ensuring up to 10 hours portable application.



#### Touch Active Fingerprint Sensor

The touch active sensor ensures the quick response for each detection and saving the total power consumption of the device.



#### Optional WIFI

The WiFi function ensures power on to work, and realize the flexible installation of the device.



#### Touch Active Keypad

The touch active sensor ensures the best user experiences for and saving the total power consumption of the device.



#### Colorful LCD Screen

The Colorful LCD screen ensures the best interaction and user experiences and can also provide clear notifications to the users.



#### Webserver

The Webserver ensures the easily quick connection and self management of the device





#### Cloud application

The web based cloud application let you access to the device by any mobile terminal from anytime and anywhere.

### ■ Key Specifications

|                       |   |
|-----------------------|---|
| User                  | 3000  |
| Card                  | 3000  |
| Record                | 100000  |
| Communication         | TCP/IP, Mini USB & USB Host,Optional WiFi                       |
| Identification mode   | Finger, password, card (Standard EM card, optional Mifare card) |
| Identification speed  | <0.5s   |
| Card reading distance | "1~5cm ( 125KHz), 13.56MHz >2CM ) for standard CR80 card"       |
| WebServer             | support   |
| CPU                   | Linux 1G  |
| RFID card             | Optional EM and Mifare  |
| working Temperature   | -30°C~60°C  |
| Humidity              | 20% to 90%  |
| Power                 | DC12V/Optional Battery  |

### ■ System configurations

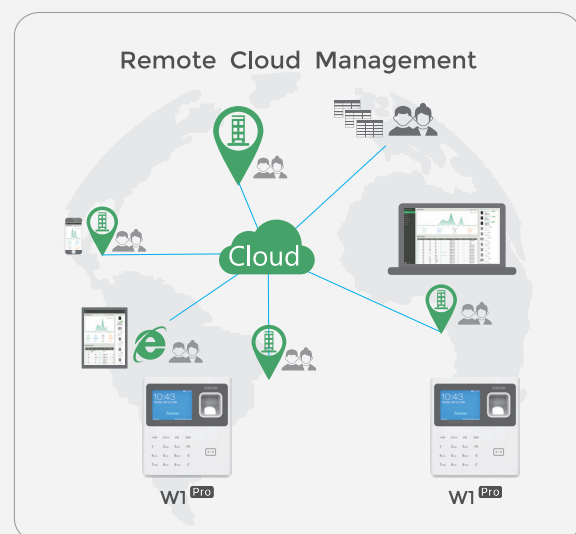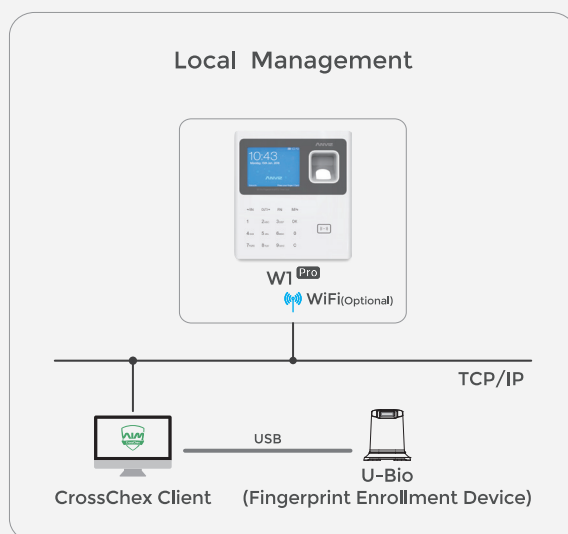

#### Anviz Global Inc.

41656 Christy Street Fremont , Fremont, CA,94538

Tel: 408-2637700 | Toll-free:1-855-268-4948 | Inquiry: [sales@anziv.com](mailto:sales@anziv.com) | [www.anziv.com](http://www.anziv.com)

©2019 Anviz Cloabl Inc. Anviz and identifying product names and numbers herein are registered trademarks of Anviz Global Inc. All non-Anviz brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice.

Due to the consistent improvement of the product, this specification and appearance are subject to change without notice.