



C2C

Color RFID Time Attendance

EM III



MiFare

ARM system platform, HD LCD

C2C is the color RFID attendance system designed for medium or large size enterprises. It integrates High Definition TFT LCD and ARM system platform to ensure a stable performance. C2C has an ultra slim design with the thickness of only 3cm, which makes it extremely elegant on the wall. Stylish 3" widescreen High Definition TFT display can show multi-languages for different local market. Standard RFID reader, optional Mifare card reader are specially designed for the existing card users and higher security level. In addition, with the unique Fn button, users can have great convenience to manage complicated custom-defined work code or time attendance status in practical situation.

BioNANO[®]
Core Algorithm
Fingerprint - Facial - Iris

Fast fingerprint scan
in less than 0.5 second




⊕ Feature

- Extremely thin and refined design
- 3" widescreen High Definition TFT display
- User friendly graphic interface
- Support multiple display and software languages
- Clear voice prompts along with all operations
- Mini USB slave
- Easy TCP/IP connectivity
- Realtime data transfer
- Inbuilt RFID reader, Optional Mifare card reader
- 12-digit user ID and user name display
- 16 different customizable time and attendance status
- Auto time and attendance status switch
- 6-digit work code to calculate different job cost
- Public and private short message display
- Auto daylight saving
- Employee self-service record inquiry

⊕ Parameter

| Item | Description |
|-----------------------------|--|
| LCD | 3"widescreen High Definition TFT display |
| Card Capacity | 20000 |
| Log Capacity | 200000 |
| Identification Mode | Card, ID+PW, PW+Card |
| Communication Interface | Mini USB slave, USB Flash Drive Host, TCP/IP |
| Card Reader Module | EM RFID, Optional Mifare |
| Name Display | Yes |
| Fingerprint Image Display | Yes |
| Self-defined Status | 16 customizable time and attendance status |
| Auto Status Switch | Yes |
| Workcode | 6-digit |
| Short Message | 50 |
| Daylight saving | Yes |
| Self-service Record Inquiry | Yes |
| Size | 140(w)*190(h)*30(d)mm |
| Temperature | -10 C ~40 C |
| Operating Voltage | DC 5V |
| Certificates | FCC, CE |
| Applicable Situation | Up to 10000 Employees |


⊕ Topology

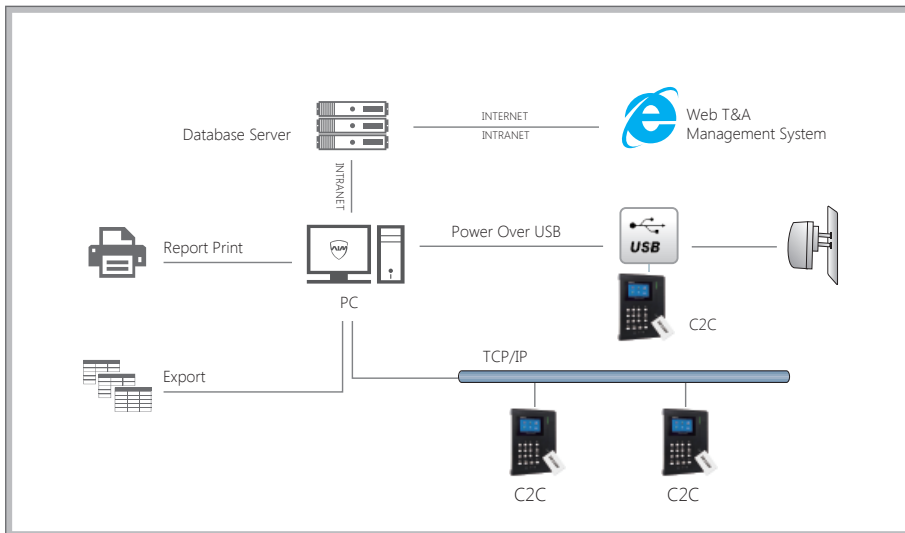

AIM Standard

AIM is a software platform available for Anviz all products including time and attendance, access control, smart lock and distributed access controller etc. It provides remote control, network management and mobile solutions for different user.

⊕ Time & Attendance Software Interface

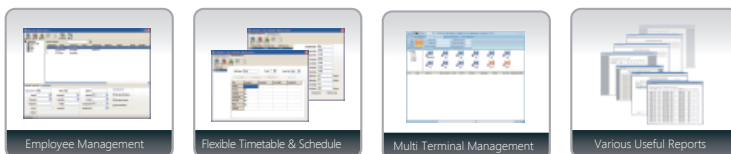

Operation system

Microsoft Windows 2000
 Microsoft Windows 2003
 Microsoft Windows XP

Microsoft Windows Vista
 Microsoft Windows 7

ANVIZ® and **BioNANO®** registered trademarks of Anviz Global and cannot be used without the permission of Anviz. Due to the consistent improving of the product, this specification and appearance is subject to change without notice.