

FaceDeep 3 Series QR

GreenPass QR Code Scanning Solution to Verify EU Digital COVID Certificates



Anviz has achieved the GreenPass QR Code scanning solution with its latest facial recognition access control terminals FaceDeep 3 Series to quickly verify that an EU Digital COVID Certificate is valid. QR Code with GreenPass information can be read by FaceDeep 3 Series QR and the result will be displayed on the screen, a valid result can trigger the device relay for the opening door, turnstile, speed gate or green light for being used in the public, private spaces where the GreenPass is required.

FaceDeep 3 Series QR Smart Face Recognition Terminal with QR Code Scanning

Key Features

QR Codes Verification

Supports all EU countries QR codes and quickly verify EU Digital COVID Certificates via an app on your phone, or paper versions are also available.



Security and Data Protection

Keeps visitor and user confidentiality without storing any data after scanning the GreenPass QR Code.



Multi-technology

FaceDeep 3 Series QR provides strong and safe touchless QR codes and face recognition technology to let users go cardless by using QR code scanning or faces as credentials. FaceDeep 3 IRT QR with Body Temperature Detection technology, specifically designed for simultaneous personnel access authority.



Great User Convenience


FaceDeep 3 Series QR provides the user convenience with a 5" touch screen and it can connect Anviz CrossChex Cloud software to check access and punch records from anywhere, anytime.



Various Applications

FaceDeep 3 Series QR can be used in many practical scenarios, including visitor management, hotel, business organizations, small and medium enterprises, stadiums or public events.

System Configurations

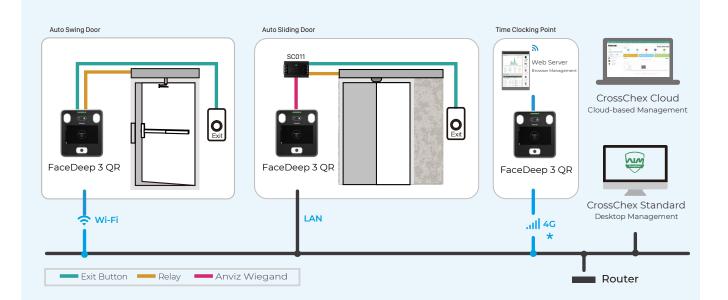

* 4G Setup: Refer to FaceDeep 3 Quick Guide related

Disclaimer: Anviz's products listed herein are not designed for medical devices and not intended for use in the diagnosis of disease or other conditions. When configured correctly, Anviz's products listed herein can identify individuals with skin-surface temperature relative to a preset figure but should not be solely or primarily relied upon to diagnose any other disease. Anviz's products must be used in accordance with local laws and regulations.



Optional Installation Mounts for Different Applications



Station Mount





Turnstile Mount

Desktop Mount

Key Specifications

	Model	FaceDeep 3 QR	FaceDeep 3 IRT QR
General	Identification Mode	EU Green Pass Code, Mask Detection, PIN Code, Body Temperature Detection (IRT)	
	QR Code Scanning Distance	3~10cm (1.18~3.94")	
	QR Code Reading Angle	Roll 360 ° Pitch ± 80° Yaw ± 60°	
IRT (Palm Temperature Detection)	Detection Distance	_	10~20mm (0.39~0.79")
	Temperature Range		23°C~46°C (73°F~114°F)
	Temperature Accuracy	_	±0.3°C (0.54°F)
Capacity	Max Users	6,000	
	Max Logs	100,000	
Function	Vaccination Detection	Support 1st / 2nd / 3 rd Dose Vaccination Detection	
	Negative Test & Recovery Result Detection	Yes	
	Temperature Detection	_	\checkmark
	Mask Detection		1
	Voice Prompt	\checkmark	
	Alarm Output	\checkmark	
	Multiple Language		
Hardware	CPU	Dual 1.0GHz	
	Camera	Dual Camera (VIS & NIR)	
	Display	5" TFT Touch Screen Resolution 720*1280	
	Smart LED	Support	
	Dimensions(W x H x D)	146*165*34 mm (5.75*6.50*1.34")	
	Working Temperature	-5°C~60°C (23°F~160°F)	
	Humidity	0% to 95%	
	Power Input	DC 12V 2A	
Interface	TCP/IP	\checkmark	
	RS485	\checkmark	
	USB PEN	\checkmark	
	Wi-Fi	\checkmark	
	Relay	1 Relay Out	
	Tamper Alarm	\checkmark	
	Wiegand	1 ln &1 Out	
	Door Contact	\checkmark	
Software Compatibility	CrossChex Standard	\checkmark	
	CrossChex Cloud	· · · · · · · · · · · · · · · · · · ·	



Anviz Global Inc.

41656 Christy Street Fremont, Fremont, CA, 94538 Toll-free: 1-855-268-4948 | sales@anviz.com | www.anviz.com

©2021 Anviz Global Inc. Anviz and identifying product names and numbers herein are registered trademarks of Anviz Global Inc. All non-Anviz brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice.