


Installation Guide

(V3.1)

Home & Business Smart Lock

L100K/L100

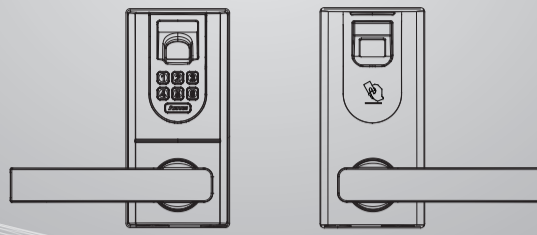


Before Connecting, operating or adjusting this product, please read the instructions carefully. Keep this manual in case you need it at a later date.

ANVIZ® is registered trademark of Anviz Global Inc. in the United States and other countries. It cannot be used without the permission of Anviz.


Installation Instructions

L100K/L100

Product And Accessories

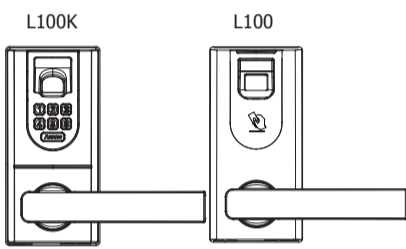


Outside panel




Inside panel and battery cover



RFID cards (L100) and Emergency keys



2 Rubber mats and 1 mounting plate




Latch Bolt



Lock Spindle, Screwdriver and fixing Screws
(4 long screws for outside panel mounting,
2 short screws for inside panel mounting,
2 short screws for bolt fixing.)

-1-


Installation



► Step 1

Insert latch bolt into the door as shown in diagram. Fasten the screws.


* See Note 1



► Step 2


Install outside panel with rubber mat on door, and route the wire through the hole over the latch bolt.

* See Note 2




► Step 3

Install Mounting Plate with Rubber Mat and route wire through left hole. Install four screws on the Mounting Plate to fix the position. Recommend: DO NOT OVER TIGHTEN the two screws above.



► Step 4


Install the lock spindle through the latch bolt and make sure the lock spindle plugs into the outside panel.



► Step 5

Remove the above 2 screws installed on mounting plate. Connect wire from the Outside panel to Inside panel. Install lock spindle into inside panel.

Initialization button



► Step 6

Fasten four screws to fix the inside panel. Turn the knob to make sure that you can push the dead bolt. Install alkaline batteries and battery cover.

Note 1: Make sure the hole dimension is fit for bolt installation (Refer to chapter "New Door Preparation").

Note 2: Make sure the bottom screw rod get through the holes in latch bolt.

-2-

www.anviz.com




Please scan this bar code to win Anviz vCard

ANVIZ
Intelligent.Security


New Door Preparation

1 Mark Door




Choose 60mm or 70mm(2 3/8" or 2 3/4") backset and use installation template to mark the holes on door face.
(Installation Templates provided)

2 Drill Holes




Drill appropriate holes(53mm, 26mm, 2*7mm) as indicated on installation template.


3 Install Latch Bolt



1) Insert latch bolt to the hole and keep it parallel to door face. Mark outline of reinforcement plate and remove the latch bolt.




2) Chisel 3mm(1/8") deep until the face palte is fill with door edge.




3) Mark and mortise jamb for strike location. Chisel 3mm(1/8") deep until the face palte is fill with door frame. And chisel about 12mm(1/2") deep for bolt.

New Door Preparation


4 Adjust backset length

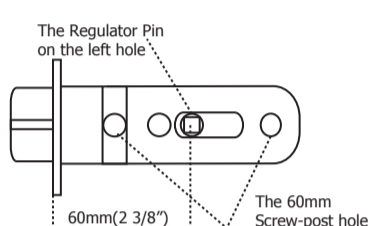

1)The backset is a distance from the door edge to the center hole of the door face. The default length is 60mm(2 3/8").

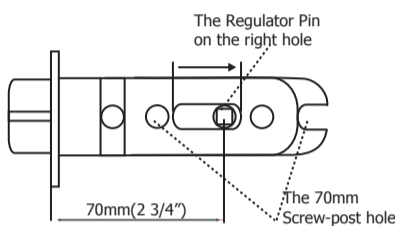

2) Turn the PIN (in 60mm) into the bolt housing. Pull bolt mechanism out of housing and turn the PIN to position 70mm.

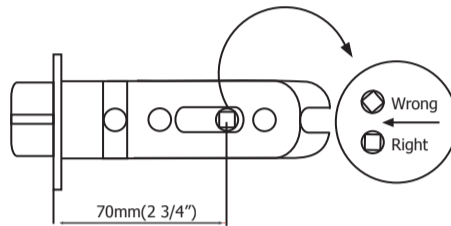

3) The backset is 70mm (2 3/4") long.

The products are subject to change without notice.

Anviz Global Inc., (the "Company") warrants to the original purchaser that the Company's products for one (1) year from the date of purchase to be free of structural and mechanical defects due to faulty materials or workmanship under normal use and service.

For Warranty Service

Please register your product at <http://www.anviz.com/members/login.html> for follow warranty service and technical support service.

All defective products must notify the Company's International Support Department, The International Support Department will decide to either have the product returned for repair or replacement. The defective product must be returned to the Company within thirty (30) days of failure and with a description of the failure and Return Merchandise Authorization (RMA) number supplied by the Company. To receive a RMA number and obtain assistance on where to deliver the hardware, please E-Mail at: support@anviz.com. Any product returned with out RMA will be refused. During the warranty period, the Company agrees to repair or replace, at its sole option, without charge to Original Purchaser, any defective component part of the hardware. To obtain service, Original Purchaser must return the hardware to the Company in original product packaging or in an adequate container for shipping. The postage, shipping, and insurance charges incurred in shipping to the Company will be paid by Original Purchaser, and all risk for the hardware shall remain with the Original Purchaser until such time as Company takes receipt of the hardware. Upon receipt, the Company will promptly repair or replace the defective unit, and then return said unit to Original Purchaser, postage and shipping prepaid. The Company may use reconditioned or like-new parts or units, at its sole option, when repairing any hardware. Repaired products shall carry the same amount of outstanding warranty as from original purchase, or ninety (90) days, whichever is greater. Any claim under the warranty must include dated proof of purchase or invoice. In any event, the Company's liability for defective hardware is limited to repairing or replacing the hardware.

Note: Register your product at <http://www.anviz.com/members/login.html>

What Does This Warranty Not Cover?

The following costs expenses and damages are not covered by the provisions of this limited warranty:

- (1) Shipping and freight expenses required to return the Company.
- (2) Failures, defects, or damage (including, but not limited to, any security failure or loss of data) caused by any third party product, service, or system connected or used in conjunction with the Product.
- (3) Any other incidental, indirect, special or punitive damages, whether based on contract warranty, tort (including, but on limited to, strict liability or negligence) patent infringement, or otherwise, even if advised of the possibility of such damages.
- (4) The Product use for purposes for which they are not designed or intended.
- (5) The Product which have been subjected to alteration, abuse, misuse, negligence or accident.
- (6) The product has been improperly stored, installed, maintained or operated.
- (7) The product has been used in violation of written instructions provided by the Company.
- (8) The product has been subjected to improper temperature, humidity or other environmental conditions or which, based on the Company's examination, do not disclose to the Company's satisfaction non-conformance to the warranty.

Additionally, this warranty DOES NOT COVER scratches abrasions or deterioration due to the use of paints, solvents or other chemicals.

This warranty gives you specific legal right, and you may also have other right as otherwise permitted by law. If this Product is considered a consumer product, Please be advised that some laws do not allow limitations on incidental or consequential damages or how long an implied warranty lasts. So that the above limitations may not full apply. Refer to your local laws for your specific right under this warranty.



WARRANTY REGISTRATION

Company: _____

First Name: _____ Last Name: _____

Tel: _____

E-mail: _____

Address: _____

City: _____ State: _____ Zip Code: _____

Model Number: _____

Product Serial Number: _____

Date of Purchase: _____

How to register my warranty?

- 1. Register online. Visit www.anviz.com
- 2. Scan this barcode via your mobile phone. Quick access to the registration page.

